

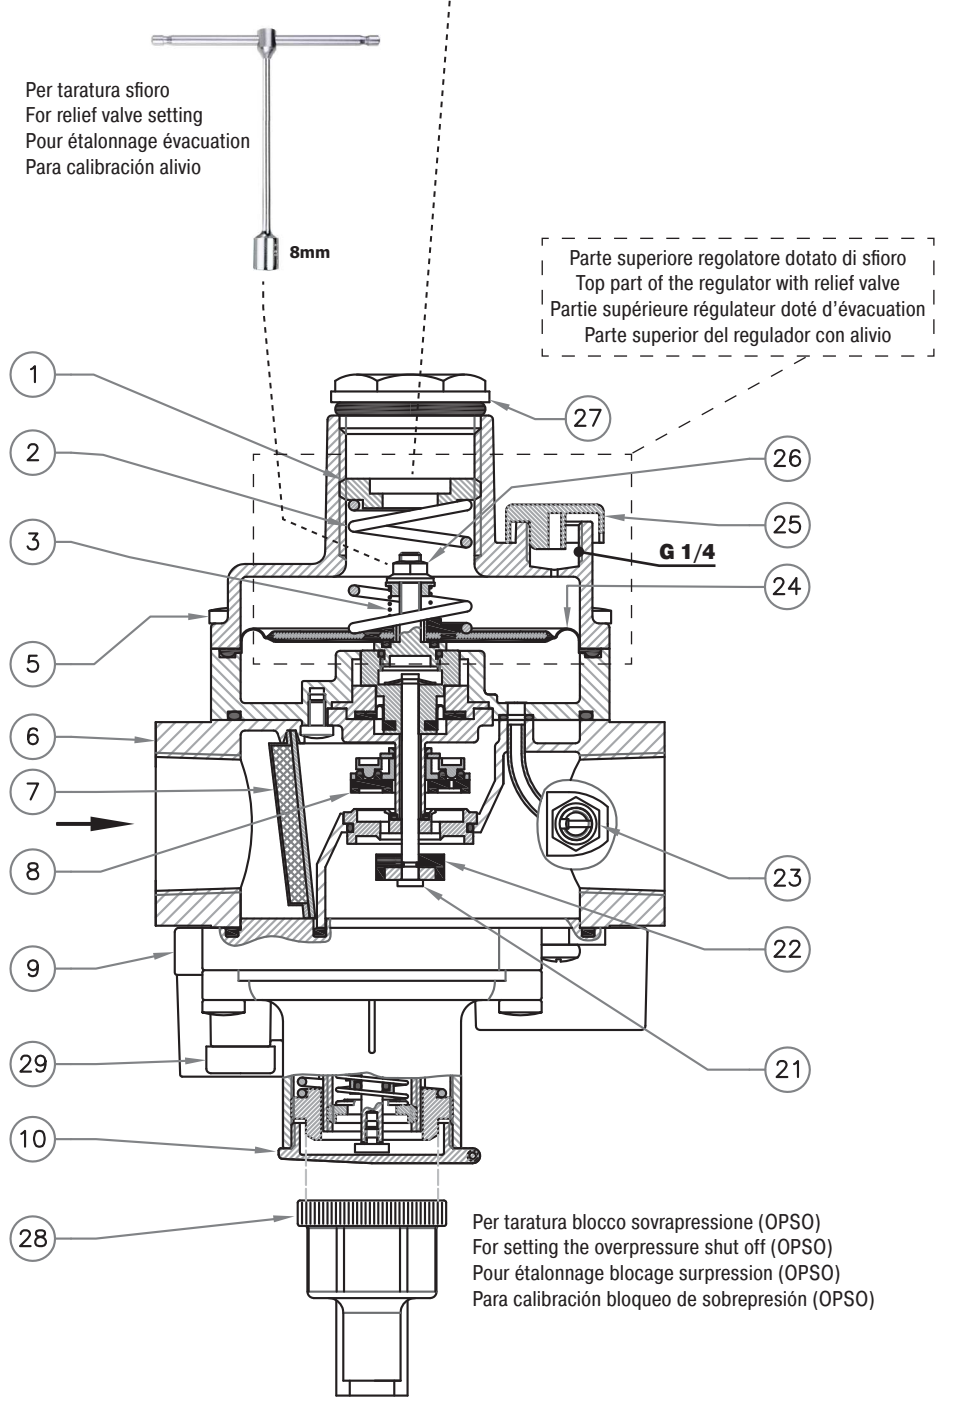
IT

EN

FR

ES

fig. 1a - COMPACT
 2MBC DN 15 - DN 20 - DN 25
 (Q max = 25 Nm³/ gas)






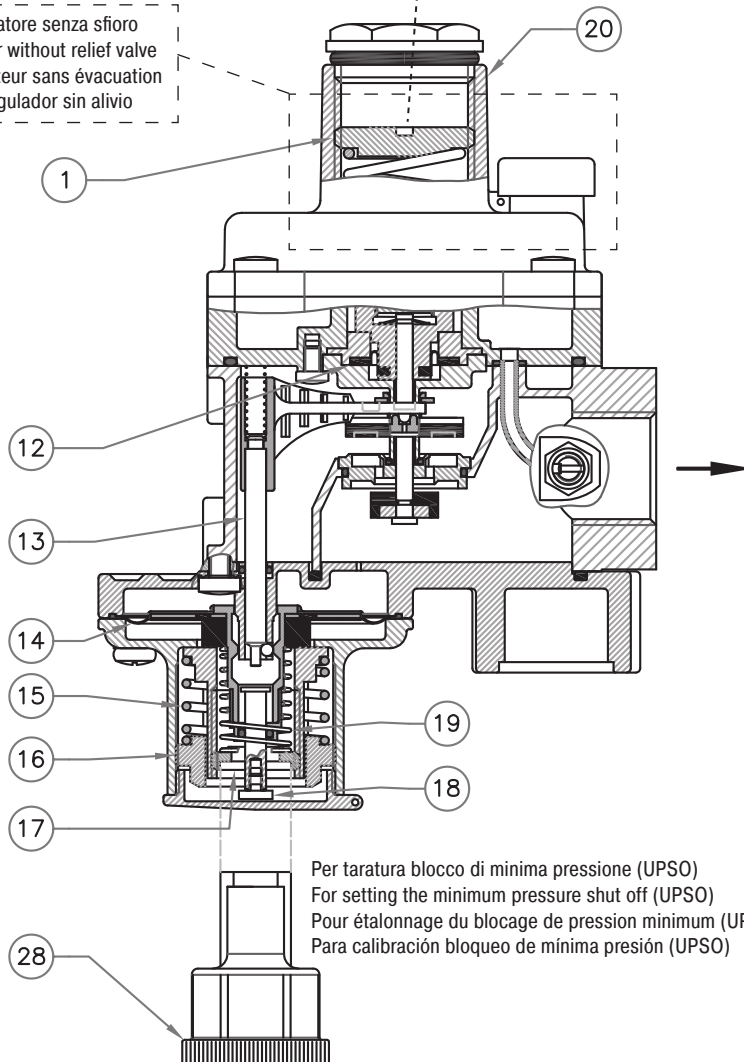
FRG/2MBC... (COMPACT)		
● Utensile necessario per taratura Pa / Required tool for setting Pa ● Outil nécessaire pour régler Pa / Herramienta requerida para calibración de Pa		
Pa Range (mbar)	con sfioro / with relief avec évacuation / con alivio	senza sfioro / without relief sans évacuation / sin alivio
10 ÷ 25		
25 ÷ 35		
35 ÷ 80	 13mm	
80 ÷ 120		
110 ÷ 200		

fig. 1b - COMPACT
2MBC DN 15 - DN 20 - DN 25
(Q max = 25 Nm³/gas)

Parte superiore regolatore senza sfioro
Top part of the regulator without relief valve
Partie supérieure régulateur sans évacuation
Parte superior del regulador sin alivio



Per taratura blocco di minima pressione (UPS0)
For setting the minimum pressure shut off (UPS0)
Pour étalonnage du blocage de pression minimum (UPS0)
Para calibración bloqueo de mínima presión (UPS0)